




STAR HEADLIGHT & LANTERN CO.

TDC-3

8-Output Traffic Director Control Module

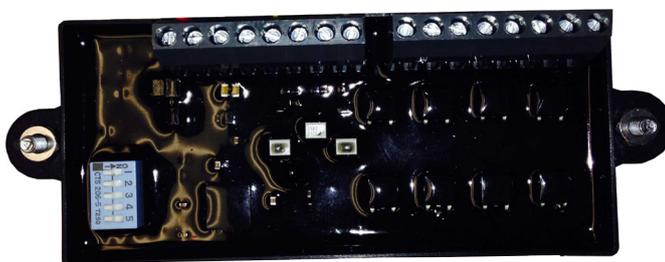

TDLIN



SB4020



Any 2 or more position switch box

OR



LCS850MG

Any siren with logic Traffic Director controls
(LCS850, LCS881, LCS850MG, LCS771)

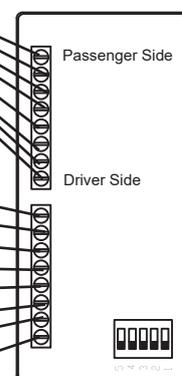

TDC-3

Specifications and Features

- The TDC-3 Control Module is designed to allow you to operate a 6 or 8 head "dummy" LED traffic director stick using the existing switches on your light control siren, or other external switches
- Only 4 control wires needed
- Compatible with most light control sirens
- Compatible with both stand-alone sticks or light bar-integrated sticks
- Controls up to 6 Functions: Right, Left, Center-Out, Warn Level 1, Warn Level 2, Dim
- 10 optional Traffic Directing Pattern Styles
- 30 optional Warning Patterns
- 11 optional Head Enable Settings
- 5 Phase Setting Options
- Nighttime Dim Option
- Warn/TD Pattern Cycling Option
- Compact Unit (4.6" x 2.2")
- Clone Feature: duplicate settings from one unit to other units
- Voltage: 10-32VDC (Do not operate outside the voltage that your stick is rated for!!)
- Operational Current Draw: up to 2.5 amps per head
- Standby Current Draw: 0.0001A

Model Numbers/Descriptions:

TDC-3	8-Output Traffic Director Control Module
-------	--

SF167 Rev A 11-2-2016



Star Headlight & Lantern Co., Inc.
455 Rochester Street
Avon, NY 14414
Phone: 585-226-9500
Fax: 888-478-2797
starheadlight.com



PROUDLY MADE IN THE U.S.A.
An ISO 9001:2008 Certified Company