



STAR HEADLIGHT & LANTERN CO.

DLXT THINLINE PERIMETER LED LIGHTS



DLXT-121



DLXT-121C



DLXT-124



DLXT-2CUST



DLXT-3CUST



Specifications and Features

- Only ½" thick
- High intensity LEDs are built with fully encapsulated circuitry
- S-Link System™ synchronizing capability with other Star LED units (DLXT only)
- Weather resistant bezels available in Black (standard), Chrome, and White
- Interior or exterior mounting
- Surface mount or use optional mounting brackets (optional brackets only available for single bezel series)
- Reverse polarity protected
- Current limit protection over entire operating voltage

Dimensions:

single bezel - 2 ¼"H x 5 ¾"W x ½"D

double bezel - 4"H x 5 ¾"W x ½"D

triple bezel - 6"H x 5 ¾"W x ½"D

- Voltage: 10-16V DC or 24V DC

- Amp draw: 0.3 amps @ 12V DC, 0.2 amps @ 24V DC

- Color combinations: DLXT, DLHT



DLTT

Model Numbers/Descriptions:

DLXT Series	Auxiliary standard warning LED light, 10 plus customer selectable flash patterns, including steady-on
DLHT Series	Auxiliary hazard/turn LED light, flasher in warning pattern overridden by turn signal output, flashes with turn signal input, 10 customer selectable flash patterns
DLTT Series	Auxiliary stop/tail/turn LED light
DLDT-124-AB	Dual-function, Dual-Color (Amber/Blue only), independent activation control over each color
DLXT-2CUST	Auxiliary standard warning LED light, 10 plus customer selectable flash patterns, including steady-on, double bezel
DLXT-3CUST	Auxiliary standard warning LED light, 10 plus customer selectable flash patterns, including steady-on, triple bezel

Warning: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SF058 Rev I 7-22-2020

STAR
WARNING
SYSTEMS®

STAR SIGNAL
VEHICLE PRODUCTS®

Star Headlight & Lantern Co., Inc.

455 Rochester Street

Avon, NY 14414

Phone: 585-226-9500

Fax: 888-478-2797

starheadlight.com

BRADFORD™
Vehicle Solutions Inc.



PROUDLY MADE IN THE U.S.A.
An ISO 9001:2015 Certified Company





STAR HEADLIGHT & LANTERN CO.

DLNT AUXILIARY LIGHTS



DLNT-121



DLXT-121S



DLNT-122SCRW

Specifications and Features

- High intensity LEDs
- Black (standard), or Chrome finish available in all three bezel options
- Fully encapsulated circuitry
- Surface mount
- Reverse polarity protected and current limit protection over entire operating voltage
- Dimensions:
 - single bezel** - 2 1/4"H x 6 7/8"W x 1/2"D
 - double bezel** - 4"H x 6 7/8"W x 1/2"D
- Voltage: 10-16V DC or 24V DC
- Amp draw: 0.3 amps @ 12V DC, 0.2 amps @ 24V DC
- Color combinations: DLNT -
 - DLNT-S single bezel , DLNT-S double bezel

Model Numbers/Descriptions:

DLNT Series	16 LED, steady burn value head, for use as an auxiliary area light, compartment light, or dummy head
DLNT-S Series	16 LED, steady burn value head, area of compartment lighting with on/off switch, for interior mounting only

SINGLE BEZEL SERIES BRACKETS



274-DLXT-W
Window mounting



274-DLXT-45
45° angle mounting



274-DLXT-U
L-bracket for universal mounting



274-DLXT-T
Trunk mounting




274-DLXT-1X2
L-bracket for mounting two single bezel series LED lights horizontally



274-DLXT-2X1
L-bracket for mounting two single bezel series LED lights vertically



274-DLXT-RL
License plate mounting

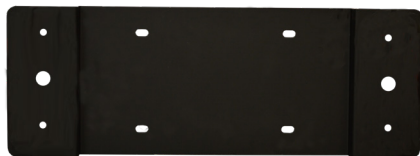

BB274-DLXTHU-LPB
License plate bracket holds two DLXTHU or DLXT units



BB274-DLXT-LPB
License plate bracket holds six DLXT models, three on each side

STAR
WARNING
SYSTEMS®

STAR SIGNAL
VEHICLE PRODUCTS®

Star Headlight & Lantern Co., Inc.
455 Rochester Street
Avon, NY 14414
Phone: 585-226-9500
Fax: 888-478-2797
starheadlight.com

BRADFORD™
Vehicle Solutions Inc.



PROUDLY MADE IN THE U.S.A.
An ISO 9001:2015 Certified Company