




# 274-DLXT Mounting Brackets




**Universal "L" Bracket**  
274-DLXT-U

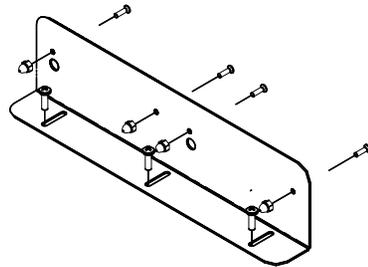


**Horizontal Two Light "L" Bracket**  
274-DLXT-1X2




**Trunk Bracket**  
274-DLXT-T




**Vertical Two Light "L" Bracket**  
274-DLXT-2X1




**Window Bracket**  
274-DLXT-W



**45° Angled Bracket**  
274-DLXT-45

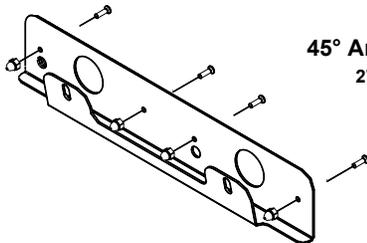

**Two Light Rear License Plate Bracket**  
274-DLXT-RL

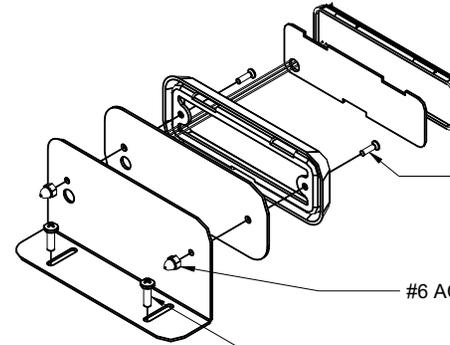


**274-DLXT-U**

#6-32 X 5/16" (P30052-47)

#6 ACORN NUTS (P30092-7)

#10 X 5/8 SELF TAPPING SCREWS (P30054-23)

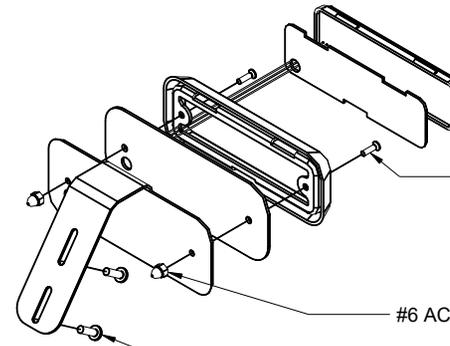


**274-DLXT-T**

#6-32 X 5/16" (P30052-47)

#6 ACORN NUTS (P30092-7)

#10 X 5/8 SELF TAPPING SCREWS (P30054-23)

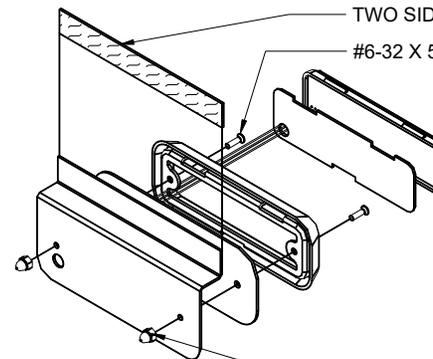

**274-DLXT-W**

TWO SIDED TAPE (P401-1)

#6-32 X 5/16" (P30052-47)

#6 ACORN NUTS (P30092-7)

# STAR


Safety Technologies by *Grote*

455 Rochester Street Avon, NY 14414

585-226-9500 (F) 888-478-2797


www.StarSafetyTechnologies.com

**Please Note:** These instructions are provided as a general guideline only. **Some vehicles may require special mounting, wiring, and/or weather-sealing. This is the sole responsibility of the installer.** Star Safety Technologies assumes no responsibility for the integrity of the installation for this or any of its products.

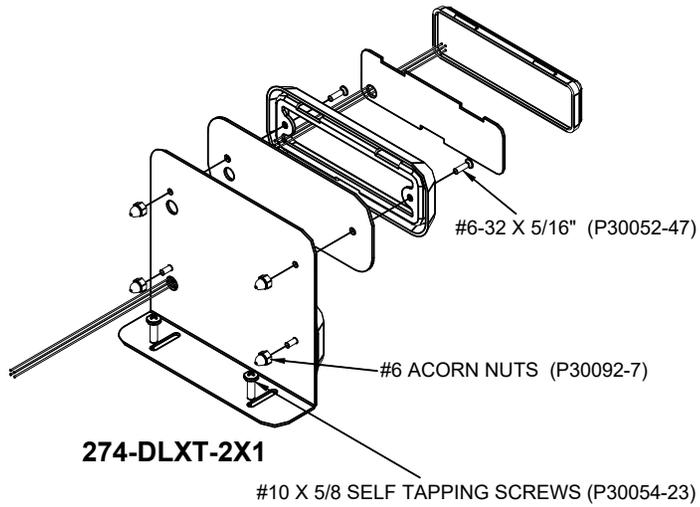


**274-DLXT-2X1**

#10 X 5/8 SELF TAPPING SCREWS (P30054-23)

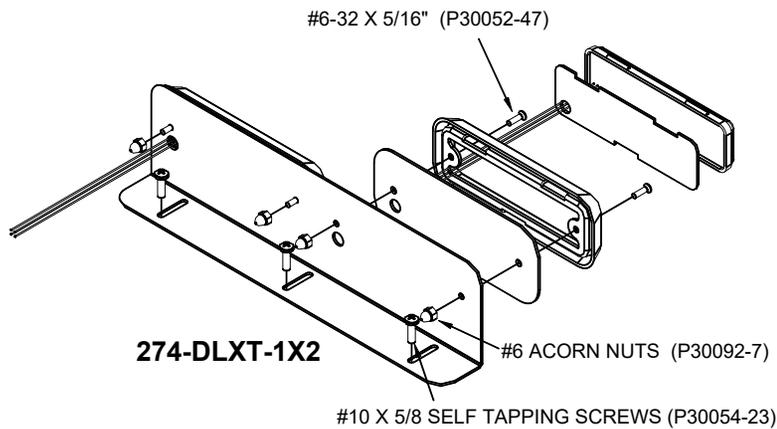

**274-DLXT-1X2**

#10 X 5/8 SELF TAPPING SCREWS (P30054-23)

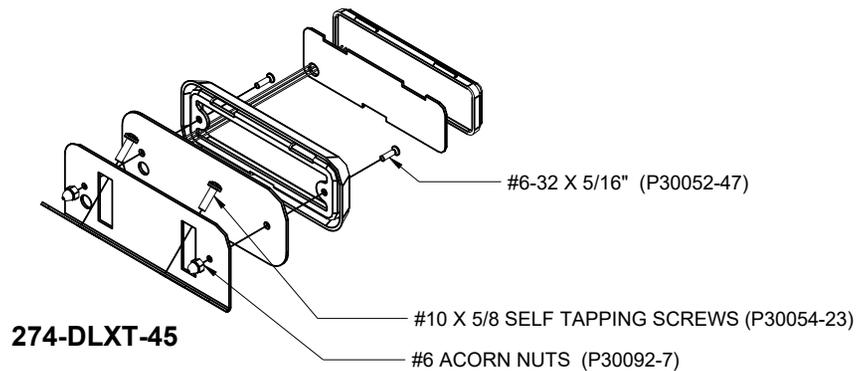

**274-DLXT-45**


**For all models except for the 274-DLXT-RL**

1. Use the two #10 x 5/8" screws to mount the bracket to the mounting surface. See the diagrams on the previous two pages for details. **CAUTION!!! Do not over tighten the screws!!!**

**For model 274-DLXT-W:** Use the double-sided tape to affix the bracket to the rear window of your truck. Use alcohol to clean the surface of the glass, allowing it to completely dry before applying the bracket to the window. **CAUTION: Do not touch the surface of the tape before attaching it to the glass.**

2. Route the wires as shown to the right:

First through the Foam Compression Gasket, then through the Bezel, Rubber Mounting Gasket, and finally through the mounting bracket.

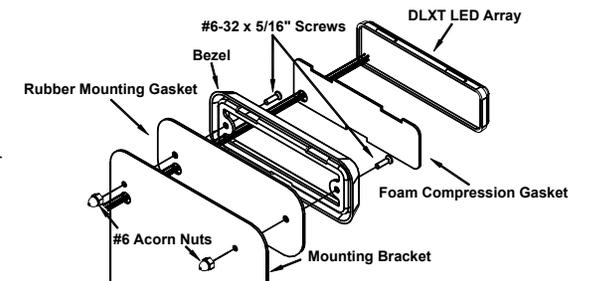


3. Mount the DLXT light(s) on the bracket as shown above. Use the two #6-32 x 5/16" screws through the back of the mounting bracket as shown. Secure the screws using the two #6 acorn nuts. Repeat for additional lights, if applicable.

**274-DLXT-RL**

1. Mount the 274-DLXT-RL bracket to your vehicle using the lower two license plate screw holes. Slide the bracket behind the license plate, between the plate and the vehicle. Use the two 1/4-20 x 1/2" screws provided.
2. Mount the two DLXT lights on the bracket as shown in the diagram below. Use the four #6-32 x 5/16" screws through the back of the mounting bracket as shown. Secure the screws using the two #6 acorn nuts.

**CAUTION!!! Do not over tighten the screws!!!**

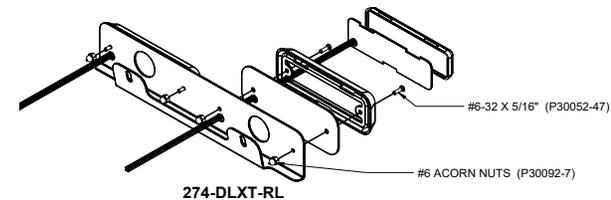

**274-DLXT-RL**

Mount the 274-DLXT-RL bracket to the two lower license plate screw holes, between the plate and the vehicle as shown above. Then mount the DLXT lights onto the bracket. **CAUTION!!! Do not overtighten the screws!!!**



PROUDLY MADE IN THE USA  
An ISO 9001:2015 Certified Company