


SPECIFICATIONS

Typical Input Voltage Range: 10-30 VDC
 Typical Current Draw: 0.6A @ 12VDC/0.3A @ 24VDC
 Flash Rate: 12 Patterns-Default Quad Flash 61qfpm
 Connections: 18"Min. wires exiting the unit.
 Permanent Mounting: 2 Hole 6.25" center
 Dimensions: (Tail Dome): 5.88" tall x 6.50
 6.50 w/Lens Guard
 Individual Shipping weight: 3.0 lbs.

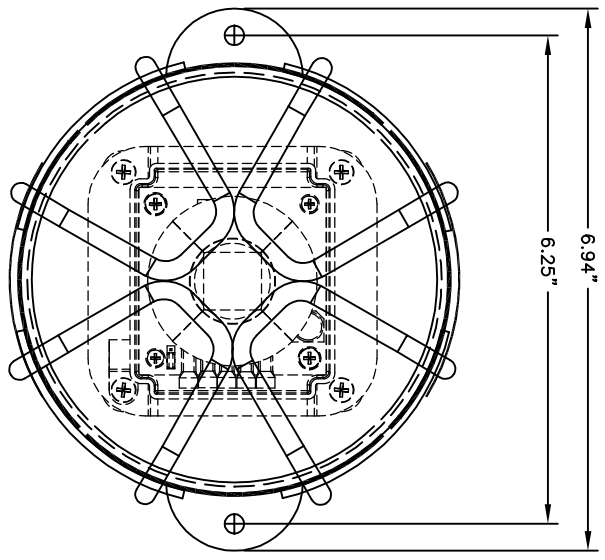

NOTE:

- 1) INSTRUCTION SHEET P/N PLT437
- 2) PACKING INCLUDES: SCART4000
 (1) UNIT BOX P/N PCART4000 UN
 (1) UNIT BOX INSERT P/N PCART4000CS
 (1) 12 x 16 POLY BAG P/N P30024-12
- 3) BOX LABEL BLANK P/N PLAB64
- 4) LENS COLORS: AMBER, BLUE, CLEAR, GREEN, RED
- 5) * = A, B, C, G, R

REV.	ECR	DESCRIPTION	DATE
-	8815	INITIAL DRAWING REQUEST	01/18/10
A	11848	ADDED SPECIFICATIONS: MOUNT PARTS, WIRE FUNCTION NOTE	03/26/14

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES Dill Tolerances ± 0.003		DRAWN BY: MD
Artwork and board size TOLERANCES: ANGULAR: ± 2 DEG. X ± .100 XX ± .020 XXX ± .005 XXXX ± .001		DRAWING APPROVED BY ECR
ROHS COMPLIANT: NA		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STAR HEADLIGHT & LANTERN CO., INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STAR HEADLIGHT & LANTERN CO., INC. IS STRICTLY PROHIBITED.
MATERIAL: NA		MODEL: 240HCFL-G
FINISH: NA		TITLE: MODEL DRAWING
DWG. NO. 240HCFL-G		REV A
SCALE: 1:1 DO NOT SCALE FROM DRAWING		SHEET 1 OF 1

STAR HEADLIGHT & LANTERN CO., INC.
 455 ROCHESTER ST. AVON NY 14414
 Ph: (585)226-9500 Fax: (585) 226-2029