
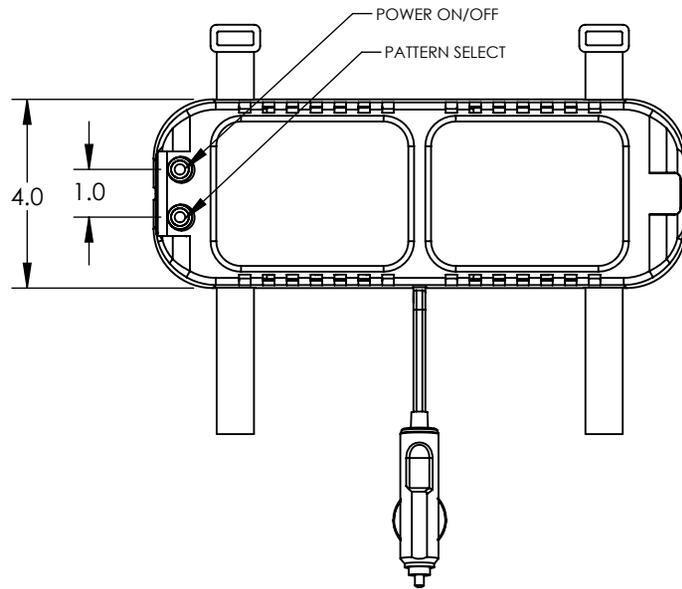


REV.	ECR	DESCRIPTION	DATE
A	18280	INITIAL DRAWING REQUEST	12/9/2021

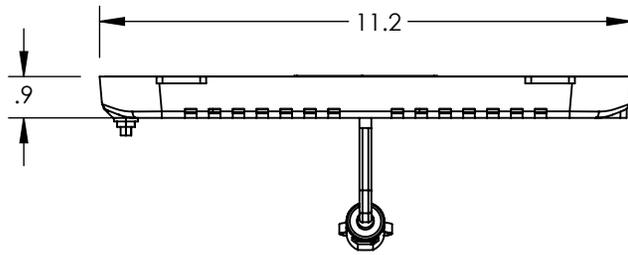

SPECIFICATIONS:

OPERATING RANGE: 9-16VDC
 NOMINAL VOLTAGE: 12 VDC
 TYPICAL CURRENT DRAW: 1A AVG, 2.8A PEAK @ 12.8VDC
 OPERATING TEMPERATURE RANGE: -40F (-40C) TO 131F (55C)

CONNECTIONS:

CIG PLUG APPROXIMATELY 11.5ft (3.5m) LONG

INSTALLATION:

VELCRO STRAPS

MATERIALS:

HOUSING: POLYCARBONATE
 LENS: POLYCARBONATE

APPROVALS:

SEE CHART

PRODUCT LABEL:

WHITE POLYESTER STOCK 1" X 3"

INDIVIDUAL PACKAGING: APPROXIMATELY 0.45Kg(1lb.)

INDIVIDUAL WHITE BOXES

INSTRUCTION SHEET:

1 PROVIDED (ENGLISH)

*: Model meets or exceeds SAE requirements when operated in one of the approved SAE patterns

MODELS	DESCRIPTIONS	MEETS PHOTOMETRICS REQUIREMENTS OF
VL22-AG	LED VISOR LIGHT; AMBER/GREEN; 9-16VDC; CIG PLUG	SAE J595 CLASS 3
VL22-AW	LED VISOR LIGHT; AMBER/WHITE; 9-16VDC; CIG PLUG	SAE J595 CLASS 3
VL22-BB	LED VISOR LIGHT; BLUE; 9-16VDC; CIG PLUG	SAE J595 CLASS 1
VL22-RB	LED VISOR LIGHT; RED/BLUE; 9-16VDC; CIG PLUG	SAE J595 CLASS 1
VL22-RR	LED VISOR LIGHT; RED; 9-16VDC; CIG PLUG	SAE J595 CLASS 1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: ± 2 DEG. .X ± .100 .XX ± .020 .XXX ± .005 .XXXX ± .001	DRAWN BY: TA	STAR HEADLIGHT & LANTERN CO., INC. 455 Rochester St. Avon NY 14414 Ph:(585) 226-9500 Fax: (585) 226-2029
	DRAWING APPROVED BY ECR	
RoHS COMPLIANT: Yes	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STAR HEADLIGHT & LANTERN CO., INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STAR HEADLIGHT & LANTERN CO., INC. IS STRICTLY PROHIBITED.	
MATERIAL: N/A	MODEL: VL22-** REV 001	
FINISH: N/A	TITLE: LED VISOR LIGHT	
	DWG. NO. VL22 REV 001	REV A
	SCALE: 1:4	DO NOT SCALE FROM DRAWING SHEET 1 OF 1