
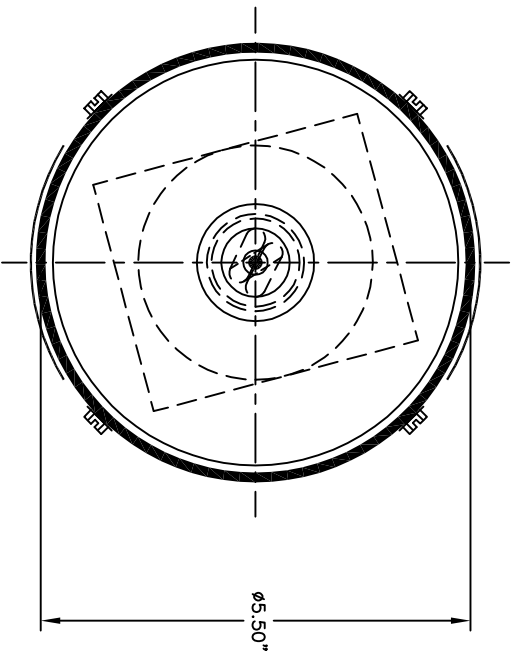


REV.	ECR	DESCRIPTION	DATE
A	143	INITIAL DRAWING REQUEST	09/27/94
B	2349	DRAWING UPDATE	08/19/98
C	8628	ADDED NEW DRAWING FORMAT & NOTES	09/23/09
D	9353	UPDATED VIEW TO S/D/Q CIRCUIT	10/15/10
E	11845	ADDED SPECIFICATIONS, & SAE.	03/26/14

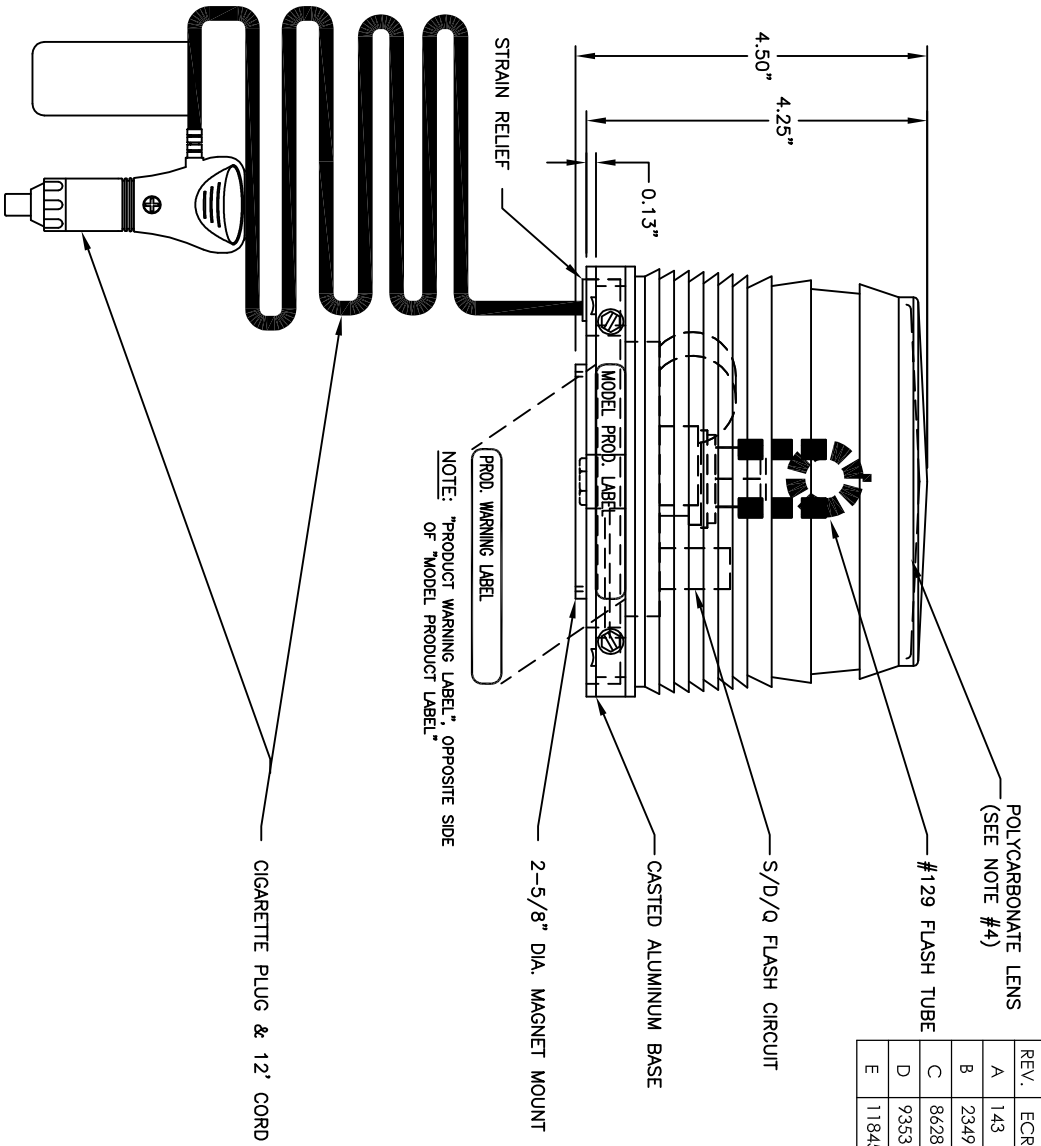

NOTE:

- 1) INSTRUCTION SHEET P/N PLTSTR126
- 2) PACKING INCLUDES: SCART2405
 (1) UNIT BOX P/N PCART4000 UN
 (1) UNIT BOX INSERT P/N PCART240INS
 (1) 12 x 16 POLY BAG P/N P30024-12
- 3) BOX LABEL BLANK P/N PLAB64
- 4) LENS COLORS: AMBER, BLUE, CLEAR, GREEN, RED
- 5) * = A, B, C, R (SAE J578)

SPECIFICATIONS

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 Drill Tolerances: ± 0.003
 Typical Input Voltage Range: 10–16 VDC
 Typical Current Draw: 2.0 A @ 12VDC
 Approval: S/D SAE J1318 Class 2 Amber, Blue, Clear, Red
 Quod SAE J1318 Class 1 Blue, SAE J1318 Class 2 Amber, Clear, Red.
 Flash Rate: S/D/Q 100fpm/65dfpm/75qfpm respectively
 Output Power: S/D/Q 24W/18.7W/24W respectively
 Connections: Cig. Plug w/12' Cord
 Mounting: 2–5/8" Dia. Magnet
 Dimensions: (Short Dome): 4.25" tall x 5.50"
 Individual Shipping weight: 3.0 lbs.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES Drill Tolerances: ± 0.003 At work and board size TOLERANCES: ANGULAR: ± 2 DEG. X ± .100 XX ± .020 XXX ± .005 XXXX ± .001	DRAWN BY: DPL DRAWING APPROVED BY: ECR	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STAR HEADLIGHT & LANTERN CO., INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STAR HEADLIGHT & LANTERN CO., INC. IS STRICTLY PROHIBITED.	MODEL: 240SM-12V-* (12V/24VDC, S/D/Q FLASH)
ROHS COMPLIANT: NA	MATERIAL: NA	FINISH: NA	DWG. NO. 240SM
TITLE: MODEL DRAWING S/D/Q STROBE WITH MAGNET MOUNT			REV: E
SCALE: 1:1 DO NOT SCALE FROM DRAWING			SHEET 1 OF 1

STAR HEADLIGHT & LANTERN CO., INC.

455 ROCHESTER ST. AVON NY 14414
 Ph: (585)226-9500 Fax: (585) 226-2029