WHEN USED WITH THE PLASTIC MOUNTING FEET

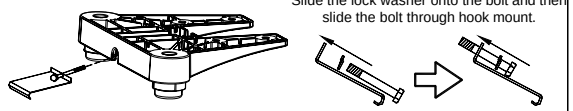

WHEN USED WITH THE METAL MOUNTING FEET

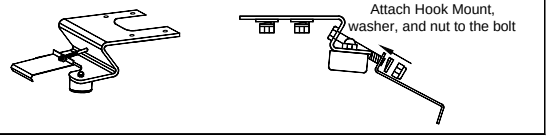

Do not over-tighten either mount!
It is not necessary to bow the lightbar or dimple the roof in order to achieve a secure, stable mount.

PLIT322INS REV. - 2/28/13

Two (2) additional 5/16 -18 x 4" bolts are included for the hook mount, should the 2¼" length be too short for your application.

WHEN USED WITH THE PLASTIC MOUNTING FEET



WHEN USED WITH THE METAL MOUNTING FEET

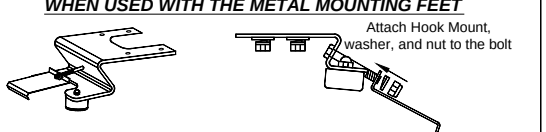

Do not over-tighten either mount!
It is not necessary to bow the lightbar or dimple the roof in order to achieve a secure, stable mount.

PLIT322INS REV. - 2/28/13

Two (2) additional 5/16 -18 x 4" bolts are included for the hook mount, should the 2¼" length be too short for your application.

WHEN USED WITH THE PLASTIC MOUNTING FEET



WHEN USED WITH THE METAL MOUNTING FEET

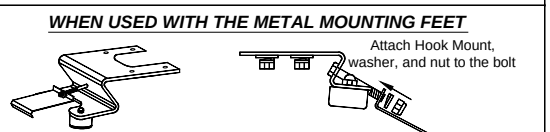

Do not over-tighten either mount!
It is not necessary to bow the lightbar or dimple the roof in order to achieve a secure, stable mount.

PLIT322INS REV. - 2/28/13

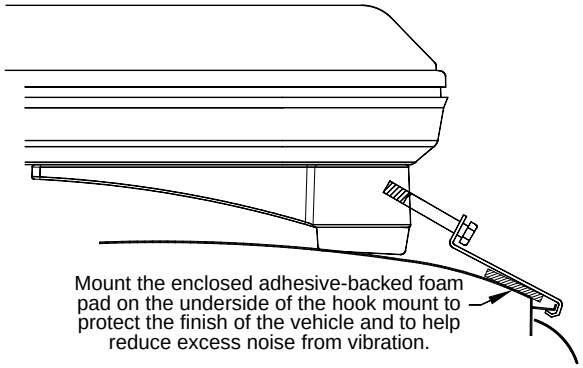
Mount the enclosed adhesive-backed foam pad on the underside of the hook mount to protect the finish of the vehicle and to help reduce excess noise from vibration.

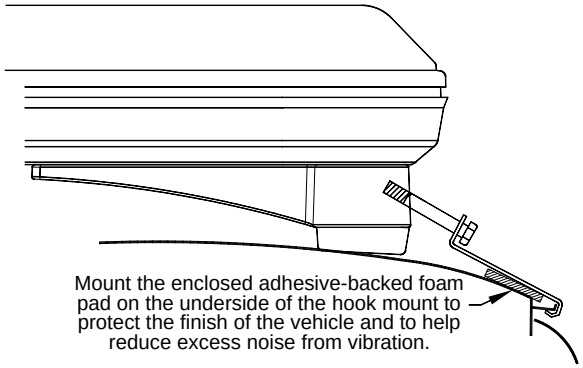
Mount the enclosed adhesive-backed foam pad on the underside of the hook mount to protect the finish of the vehicle and to help reduce excess noise from vibration.

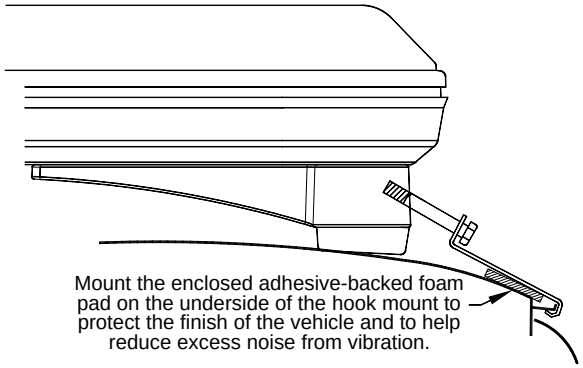
Mount the enclosed adhesive-backed foam pad on the underside of the hook mount to protect the finish of the vehicle and to help reduce excess noise from vibration.

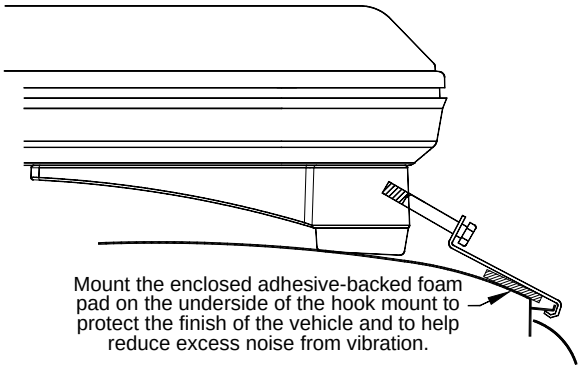
Mount the enclosed adhesive-backed foam pad on the underside of the hook mount to protect the finish of the vehicle and to help reduce excess noise from vibration.

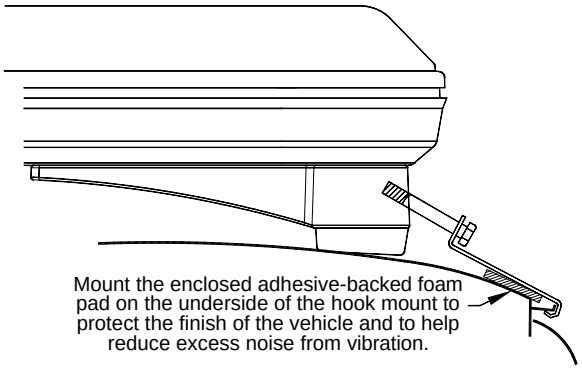
Mount the enclosed adhesive-backed foam pad on the underside of the hook mount to protect the finish of the vehicle and to help reduce excess noise from vibration.

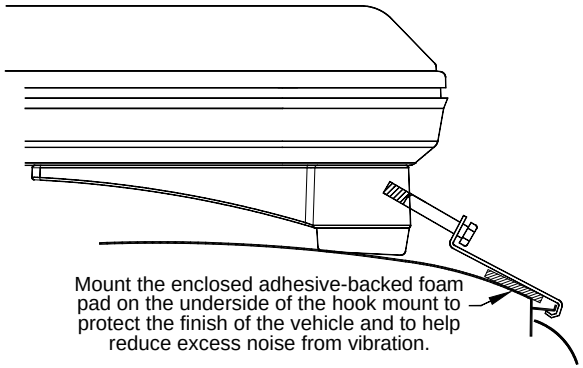
Mount the enclosed adhesive-backed foam pad on the underside of the hook mount to protect the finish of the vehicle and to help reduce excess noise from vibration.

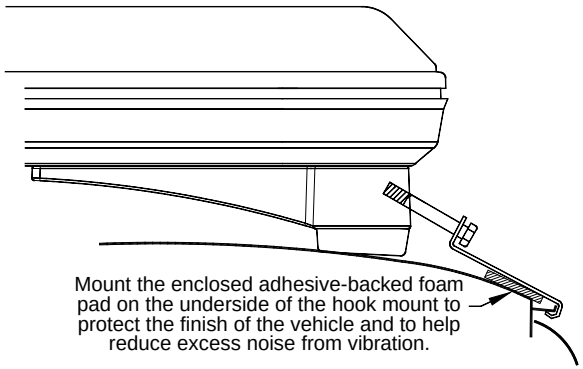
Mount the enclosed adhesive-backed foam pad on the underside of the hook mount to protect the finish of the vehicle and to help reduce excess noise from vibration.

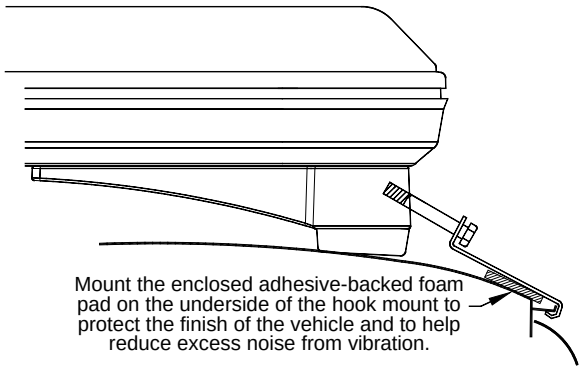
Mount the enclosed adhesive-backed foam pad on the underside of the hook mount to protect the finish of the vehicle and to help reduce excess noise from vibration.

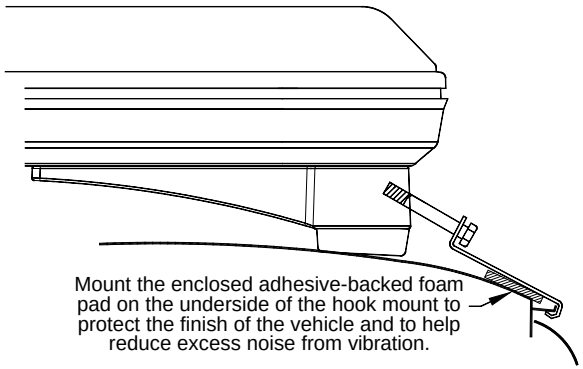
Mount the enclosed adhesive-backed foam pad on the underside of the hook mount to protect the finish of the vehicle and to help reduce excess noise from vibration.