


281 BEACON

STAR
Safety Technologies by *Grote*



FEATURES & BENEFITS

- Star X-Fire® LED technology
- Twelve different selectable flash patterns in either of two phases, plus Steady-On (excludes 281DIN, 281FDIN, 281RM models)
- Durable polycarbonate lens
- Lightweight, polycarbonate base
- Three bolt permanent mount, 12mm single bolt, magnet mount, Din, and Flexi-Din mount available
- Slotted mounting hole accommodate SAE and three bolt DIN mount
- S-Link System™ synchronizing capabilities (281, 281B, and 281R models only) with other Star LED units
- Sync. to alternating or simultaneous flash
- Dimensions: 144mm (6^{43/64}”) H x 152mm (6”) Dia.
- Voltage: perm. mount 9-32V DC, mag. mount - 10-16V DC
- Amp draw: 0.5 amps @ 12V DC, 0.3 amps @ 24V DC
- Weight: 1.36 kg (3-7 lbs)
- LED Colors:
- Lens Colors:
- Approvals: SAE Class I Amber; SAE Class II Blue, Clear, and Red: SAE Class II Rotating Amber
- REG 10 All colors

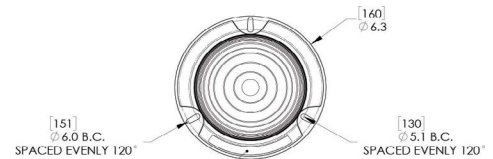

PART	DESCRIPTION
281-*	Three-hole mount, selectable flash pattern, synchronizable
281B-*	Single bolt mount, selectable flash pattern, synchronizable
281DIN-*	Quad flash pattern only, DIN mount
281FDIN-*	Quad flash pattern only, flexi-DIN mount
281M-*	Selectable flash pattern, magnet mount
281R-*	Three-hole mount, selectable flash pattern, synchronizable includes rotating pattern
281RFP-*	Flexi-DIN mount with CCW rotating pattern only
281RM-*	Rotating pattern only, magnet mount
281RP-*	DIN mount, slow rotating pattern only

Warning: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SF185 Rev-D 09-07-2023



**FOR MORE INFORMATION
VISIT OUR WEBSITE.
STARSAFETYTECHNOLOGIES.COM**

Star Safety Technologies, LLC
455 Rochester St., Avon, NY 14414
Phone: 585-226-9500 | Fax: 888-478-2797

STAR
Safety Technologies by *Grote*