

WIRING INSTRUCTIONS FOR #SP3860-4H-10 and SP3860-4H-15 (ON/OFF)(HI/LO)(ON/OFF)(ON/OFF) Switches


1. These switches are used to operate three warning lights, one with a ground-side switched HIGH/LOW option.
2. **CAUTION:** All of our DC powered warning lights are polarity sensitive. These lights are polarity protected *only if the appropriate fuse* is used. All wires connected to the positive terminal of the battery should be fused at the battery for their rated load, *in addition to* the fuse provided at the switch panel. **Testing the light before this fuse is properly installed will void the warranty on the switch and light.**
3. The BLACK wire from terminal 3 of SW1 is the ground lead and should be connected to a good chassis ground.
4. The BLACK wires from your lights should be connected to good chassis ground.
5. Connect the fused RED wire from terminal 1 of SW1 to the positive side of the 12VDC power source through a 10 or 15 amp fuse. *Be sure to check the label on the warning lights for proper voltage and current.*
6. Connect the RED wire from terminal 2 of SW1 to the power wire (typically RED) from the first light.
7. Connect the PURPLE wire from terminal 2 of SW2 to the HIGH/LOW wire (typically PURPLE) from your light.
8. The BLUE wire from terminal 2 of SW3 should be connected to the power wire (typically RED) from your second warning light.
9. The green wire from terminal 2 of SW4 should be connected to the power wire (typically RED) from your third warning light.
10. When properly installed, SW1 will be on the left side of the switch panel (front view) and turn your first light on and off. SW2 will be second from the left and switch the first light between HIGH and LOW power. SW3 will be third from the left on the switch panel and turn the second light on and off. SW4 will be on the right and turn on and off the third light.

If you have any questions concerning this or any other Star product, please contact our Customer Service Department at (585) 226-9787.



STAR
Safety Technologies by *Grote*

455 Rochester Street Avon, NY 14414
585-226-9500 (F) 888-478-2797
www.StarSafetyTechnologies.com

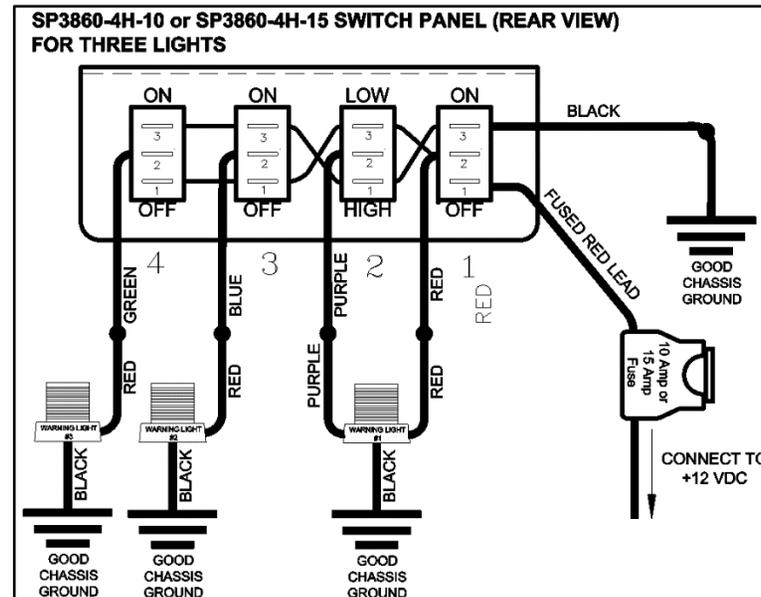

ONE YEAR LIMITED WARRANTY

The manufacturer warrants each new product against factory defects in material and workmanship for one year after the date of purchase. The owner will be responsible for returning to the Service Center any defective item(s) with the transportation costs prepaid. The manufacturer will, without charge, repair or replace *at its option*, products, or part(s), which its inspection determines to be defective. Repaired or replacement item(s) will be returned to the purchaser with transportation costs prepaid from the service point. A copy of the purchaser's receipt must be returned with the defective item(s) in order to qualify for the warranty coverage. Exclusions from this warranty include, but are not limited to, bulbs, strobe tubes, domes, and/or the finish. This warranty shall not apply to any light, which has been altered, such that in the manufacturer's judgment, the performance or reliability has been affected, or if any damage has resulted from abnormal use or service.

There are no warranties expressed or implied (including any warranty of merchantability or fitness), which extend this warranty period. **The loss of use of the product, loss of time, inconvenience, commercial loss or consequential damages, including costs of any labor, are not covered.** The manufacturer reserves the right to change the design of the product without assuming any obligation to modify any product previously manufactured.

This warranty gives you specific legal rights. You might also have additional rights that may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts. Some states do not allow the exclusion or limitation of incidental or consequential damages. Therefore, the above limitation(s) or exclusion(s) may not apply to you.

If you have any questions concerning this or any other product, please contact our **Customer Service Department** at (585) 226-9787.

If a product must be returned for any reason, please call the number above and ask for the Repair Department to obtain a Returned Materials Authorization Number (RMA #) before you ship the product back. Please write the RMA # clearly on the package near the mailing label.